

DISPLAY

AVAILABLE COLORS



Black



KEY FEATURES



- Outdoor- safe, built for permanent outdoor installation (full shade applications). Indoor TV manufacturers specifically prohibit outdoor use (just check the manual). Don't risk safety and your warranty by using an indoor TV outdoors.
- Premium 4K direct-backlit UHD screen with local zone dimming delivers breathtaking, dramatic picture detail with 4 times the resolution of Full HD
- Up to 30% brighter than indoor TVs for improved viewing in brighter outdoor environments
- Supports HDMI 2.0 and HDCP 2.2 ensuring compatibility with the latest 4K sources and streaming services.
- Powder-coated rust-proof aluminum exterior protects internal components from rain, snow, dust, insects, humidity, and salt air
- Innovative weather-tight cable entry system seals out moisture and allows for easy hook-ups
- Large media bay with plenty of room for many popular media players, cables, baluns, and extenders.
- Built-in 20W down-firing speakers for an all-in-one sound solution, or add an external audio system
- Dispersive temperature regulation system allows operation in low temperatures from -24°F and high temperatures up to 104°F (Storage temperature from -24°F up to 140°F).
- Rear IR receiver in media bay keeps IR emitter hidden & protected
- Weatherproof remote control. Leave it outdoors. Conveniently ready when you need it.
- 4 HDMI and 2 USB inputs provide plenty of connectivity options
- Optional outdoor dust cover (not included)

<p>SCREEN</p>	<p>SCREEN 65-inch Diagonal Color Active Matrix TFT LED</p> <p>RESOLUTION 3840 x 2160 UHD</p> <p>ASPECT RATIO 16:9</p> <p>CONTRAST RATIO 4000:1</p>	<p>FRAME RATE 60 Hz</p> <p>VIEWING ANGLE 178° x 178°</p> <p>RESPONSE TIME 6.5 milliseconds</p> <p>TV FORMATS 2160p, 1080p, 1080i, 720p, 720i, 480p, 480i</p>
<p>CONNECTIONS</p>	<p>RF Antenna/CATV (ATSC/QAM/NTSC) x1</p> <p>HDMI HDMI™ Input x4 (HDMI 1.4, HDMI 2.0, HDCP 2.2) 3840 x 2160 @ 60hz</p> <p>VIDEO COMPOSITE Composite Video x1, L/R Audio Inputs x1</p> <p>VIDEO COMPONENT YPbPr plus Stereo Audio x1</p>	<p>CONTROL SET Concealed Rear IR Window</p> <p>AUDIO OUT Digital TosLink Optical Audio(fixed) RCA L+R (variable)</p> <p>SPEAKERS 20 WATT internal speakers</p> <p>INPUT POWER 100-240 VAC, 50-60 Hz 2.8 A Max (205 Watts/1.8a@120v)</p>
<p>TEMPERATURE TOLERANCES</p>	<p>OPERATING TEMP -24° to 104° F. (-31° to 40°C.)</p> <p>NON-OP. TEMP -24° to 140° F. (-31° to 60°C.)</p>	
<p>PHYSICAL SPECS</p>	<p>ACCESSORIES INCLUDED Weatherproof remote control</p> <p>EXTERIOR Powder-coated aluminum.</p> <p>EXTERIOR COLORS Black Only</p> <p>TV DIMENSIONS 58.2" W x 34" H x 4" D (1480mm W x 863mm H x 102mm D)</p> <p>TV WEIGHT 70 lbs (31.75 kgs)</p>	<p>VESA MOUNT PATTERN 400mm x 400mm</p> <p>SHIPPING DIMENSIONS 65.5" W x 43" H x 9" D</p> <p>SHIPPING WEIGHT 91 lbs</p> <p>RESIDENTIAL WARRANTY 1 Year Parts and Labor</p>

Specifications

SunBriteTV Model SB-6574HD

LCD Screen	65-inch diagonal Color Active Matrix TFT LED LCD
Resolution	3840 x 2160 UHD 4k
Aspect Ratio	16:9
Contrast Ratio	4000:1
Frame Rate	60hz
H/V Viewing Angle	178° by 178°
Response Time	6.5 milliseconds
TV formats	2160p*, 1080p, 1080i, 720p, 720i, 480p, 480i * using HDMI only
Input Connectors:	
RF	Antenna/CATV (NTSC/ATSC/QAM) x1
HDMI	HDMI Input x4 (Supports HDMI 1.4, HDMI 2.0, HDCP 1.4 & HDCP 2.2)
Video Composite	Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x1
Control Set	Discrete IR Control, Concealed rear IR receiver
Audio Out	Tos-Link Optical audio (Fixed) Analog RCA jacks (variable)
Speakers	20 Watt downfiring internal speakers
Exterior	Powder-coated aluminum
Colors	Black only
Input Power	100-240 VAC, 50-60 Hz 2.8A Max (205 watts/1.8a@120v)
Operating Temp.	-24° to 104° F. (-31° to 40° C.)
Non-op. Temp.	-24° to 140° F. (-31° to 60° C.)
Accessories Included	Weatherproof remote control with battery, Dust Cover
TV Dimensions	58.2" W x 34" H x 4.00" D 1480mm W x 863mm H x 102mm D
TV Weight	70.0 lbs.(31.75 kgs)
Residential Warranty	tbd
Commercial Warranty	tbd
Vesa Mount Pattern	400mm x 400mm

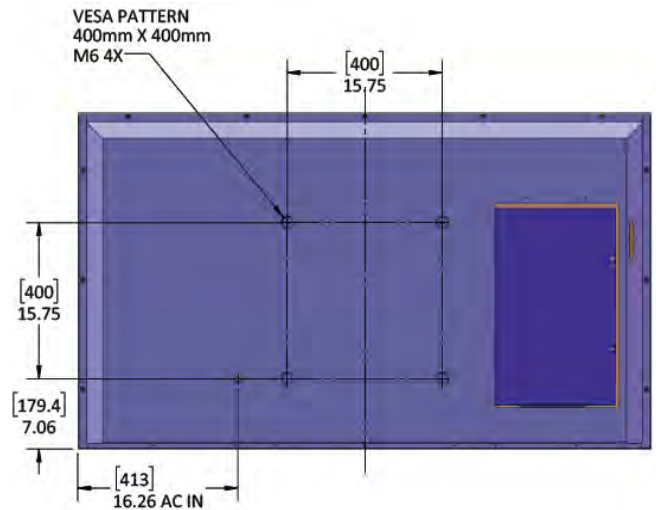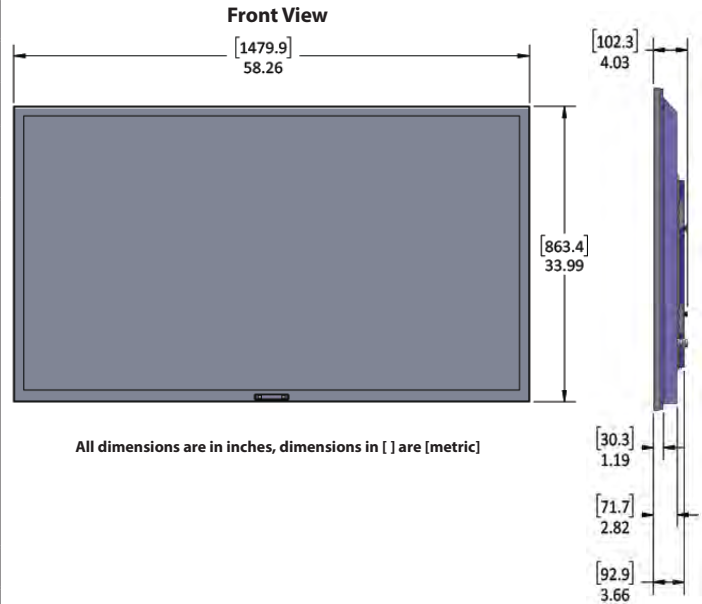

Specifications are subject to change.