



SÉURA OUTDOOR TVS

Storm Ultra Bright

Séura Storm Ultra Bright™ combines incredible brightness with sophisticated anti-reflective and anti-glare technology to provide remarkable picture clarity in any lighting conditions, including bright sunlight.

IDEAL SPACES	DISPLAY SIZES	PROTECTIVE GLASS	TEMPERATURE RANGE
Decks Patios Hot Tubs	42 inch 49 inch 55 inch 65 inch 84 inch	Anti-reflective and anti-glare safety glass	-30°F to 122°F



FULLY WEATHERPROOF

Séura Outdoor TVs are carefully designed and tested to thrive outside year-round, no matter how brutal the climate or conditions.



TRIPLE-LOCK SEAL™


Séura's Triple-Lock Seal provides three barriers of protection against dust, moisture, ice, and insects. It is so durable, that your Séura will thrive, whatever the weather.



DESIGNED TO THRIVE IN EVERY SEASON

Séura's Activ™ Airflow System keeps television components at the optimal performance temperature in all thermal conditions.

65 AND 84 INCH CONNECTIONS

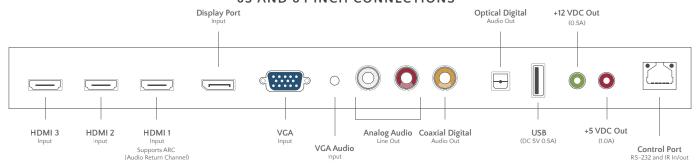

 42 INCH TV
 49 INCH TV
 55 INCH TV
 65 INCH TV
 84 INCH TV

 Model: 49-UB, Version: 3
 Model: 55-UB, Version: 3
 Model: 65-UB, Version: 3
 Model: 64-UB, Version: 3

		Model: 42-UB, Version: 3	Model: 49-UB, Version: 3	Model: 55-UB, Version: 3	Model: 65-UB, Version: 3	Model: 84-UB, Version: 3		
	PROTECTIVE GLASS		Anti-re	flective and anti-glare safe	ty glass			
	OPERATING TEMPERATURE RANGE	-30°F to 122°F*						
GENERAL	OPERATING HUMIDITY RANGE	20–80% RH, non-condensing						
	WATERPROOF RATING	IP Rated [†]						
	ISOTROPIC PREVENTION	High TNI panels prevent screen blackout						
	UV PROTECTION	Anti-reflective and anti-glare safety glass reflects UV rays						
VIDEO	VIEWABLE SCREEN SIZE	36.6" w x 20.6" h	42.3" w x 23.8" h	47.6" w x 26.8" h	55.5" w x 31.5" h	73.25" w x 41.2" h		
	DISPLAY RESOLUTION	1920 x 1080	1920 x 1080	1920 x 1080	3840 x 2160	3840 x 2160		
	DISPLAY BRIGHTNESS	700 cd/m2	700 cd/m2	700 cd/m2	630 cd/m2	600 cd/m2		
	ASPECT RATIO	16:9	16:9	16:9	16:9	16:9		
	CONTRAST RATIO	Typical 1300:1	Typical 1300:1	Typical 1300:1	Typical 1300:1	Typical 1400:1		
	TUNER	ATSC	ATSC	ATSC	N/A	N/A		
	RESPONSE TIME	8 ms	8 ms	8 ms	8 ms	12 ms		
	VIEWING ANGLE	178° Horizontal/Vertical	178° Horizontal/Vertical	178° Horizontal/Vertical	178° Horizontal/Vertical	178° Horizontal/Vertical		
	POWER CONSUMPTION	0.5W Standby, 330W Max	0.5W Standby, 340W Max	0.5W Standby, 350W Max	0.5W Standby, 400W Max	0.5W Standby, 800W Max		
INTEGRATION	HDMI	3	3	3	3	3		
	COMPONENT YPBPR	1	1	1	0	0		
	COMPOSITE (AV)	2	2	2	0	0		
	VGA	1	1	1	1	1		
	COAX	1	1	1	0	0		
	DISPLAY PORT	0	0	0	1	1		
	USB	1	1	1	1	1		
	IR IN/OUT RS-232	RJ-45	RJ-45	RJ-45	RJ-45	RJ-45		
	+12 VDC OUT	1	1	1	1	1		
	+5 VDC OUT	1	1	1	1	1		
INSTALLATION AUDIO	AUDIO: VGA/PC INPUT	1	1	1	1	1		
	AUDIO: ANALOG AUDIO LINE OUT	2	2	2	1	1		
	AUDIO: OPTICAL DIGITAL OUT	1	1	1	1	1		
	AUDIO: COAXIAL DIGITAL OUT	1	1	1	1	1		
	INTERNAL SPEAKERS	2 x 10W	2 x 10W	2 x 10W	2 x 10W	2 x 10W		
	PRODUCT DIMENSIONS	40.5" w x 24.6" h x 3.6" d	46.2" w x 27.8" h x 3.6" d	52.2" w x 31.5" h x 3.6" d	59.8" w x 35.4" h x 3.6" d	77.9" w x 45.9" h x 3.6" d (4.5" d with handles)		
	PRODUCT WEIGHT	60 lbs.	74 lbs.	92 lbs.	124 lbs.	220 lbs.		
	VESA PATTERN	400 x 400mm	400 x 400mm	400 x 400mm	400 x 400mm	600 x 400mm		
	CERTIFICATIONS AND COMPLIANCE	FCC, MET	FCC, MET	FCC, MET	FCC, MET	FCC, MET		
OTHER	WARRANTY	Séura's labor for three (3) years; glass, structure, frame, and assembly for three (3) years; TV including remote and power supply for two (2) years.						
0	REMOTE	Séura IR Remote Control						

^{*} Installation in sunlight reduces the maximum permitted air temperature.

[†] IP Rating is an international standard that specifies the degree of protection against dust and water ingress. Séura Outdoor TVs are IP rated and designed to protect against rain, snow, ice, dust, and other outdoor elements.

